

INSTALLATION GUIDE - COLORGLO™ MONOCHROMATIC LED LIGHT STRIP FIXTURES

J & J ELECTRONICS, INC.

SPECIFICATION GUIDELINES – Strip Fixtures & Components

ColorGlo Monochromatic LED Light Strip Fixtures are factory assembled in standard sizes. Custom sizes must be special ordered. In addition, ColorGlo Light Strip boards, polycarbonate tubing, end caps and cables may also be ordered as individual components.

Strip fixtures are specified for interior use (unsealed end caps) or exterior use (water tight seals). For exterior strip fixtures, the power/control cable is factory connected and sealed in place on the fixture. Accordingly, the cable length must be specified with the fixture specification. Appropriate ColorGlo power supply transformers should be specified for electrical requirements and housing for damp or dry conditions. Coupler sleeves and silicone adhesive are available for connecting multiple fixtures or for use with custom installations.

See *ColorGlo Monochromatic LED Light Strip Fixture data sheet* and *ColorGlo Power Supply Transformer data sheet* for specification details.

INSTALLATION CONSIDERATIONS


Variations in environmental conditions may cause typical expansion and contraction of polycarbonate tubing. Installation of lengths exceeding 4 ft. (1.22m) must account for these factors. For strip fixtures larger than 1 ft., mounting clips are recommended at 2 ft. (610mm) spacings.

Note 1: Exterior wet location fixtures must be factory assembled.

Note 2: The diagrams below indicate typical installations for either strip fixtures or individual components.

INTERIOR DRY LOCATION INSTALLATION

For installation in interior dry locations, slotted and closed end caps press in place to prevent dust or other contamination from entering tubing. Mounting clips hold the polycarbonate tubing secure while allowing for 360 degree rotation. We recommend the use of a clear, non-yellowing silicone adhesive for ease of in-field assembly incorporating end caps and couplers.

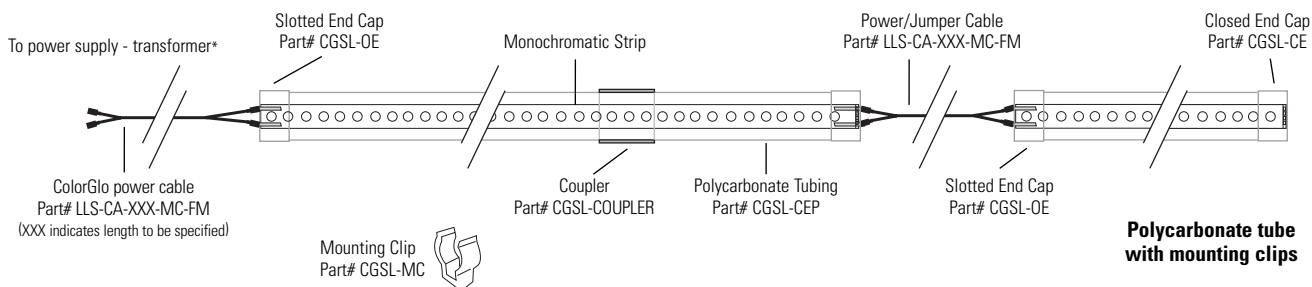

*See ColorGlo data sheet for appropriate dry location power supply transformer.




INSTALLATION GUIDE - COLORGLO™ MONOCHROMATIC LED LIGHT STRIP FIXTURES

J & J ELECTRONICS, INC.


EXTERIOR WET LOCATION INSTALLATION

For installation in damp or wet locations, a water tight end cap, with a sealing bushing and tightening nut, is factory mounted on the cabled tubing end using silicone adhesive to seal the cable entrance end. Mounting clips hold tubing secure while allowing for 360 degree rotation. Wet locations fixtures must be factory assembled.

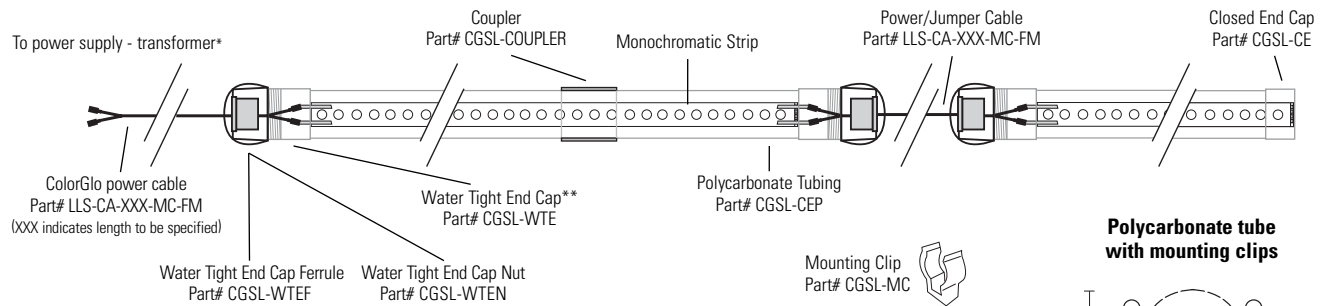

* See ColorGlo data sheet for appropriate wet location power supply transformer.
 ** Can be mounted on both ends for daisy chain configurations.

Note: Assemblies of 8' or longer will be shipped in 2 or more sections with a coupler attached. The tubes and coupler will need to be sealed in the field. The silicone adhesive included with the shipment must be used to ensure a watertight system. Failure to properly seal the assemblies will void the product warranty. Refer to Water Tight Tube Assembly Note included with shipment for complete in field assembly instructions.

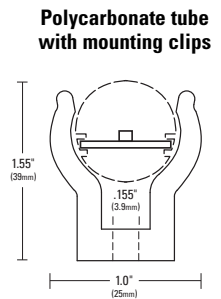

For pricing and additional information, consult your ColorGlo Sales Representative or Authorized Dealer (for rep/dealer contact information, call J&J Electronics at 800.735.4553)

Manufactured by: J&J Electronics • 35 Hammond, Irvine, CA 92618 • 800.735.4553 • 949.455.4460 • www.colorgloledlighting.com
 ©2009 J&J Electronics, Inc. All rights reserved. ColorGlo is a trademark of J&J Electronics, Inc. All other registered and trademarked brands and names are the property of their respective companies. **Rev. 043009**