


COLORGLO™ LED CHANNEL LETTER INSTALLATION GUIDE

J & J ELECTRONICS, INC.

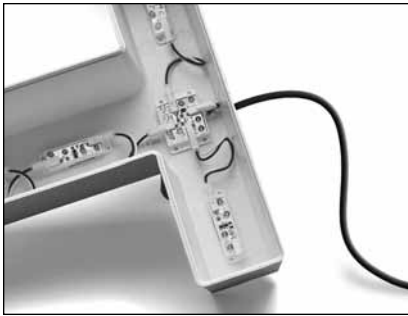

- 1 Connect the Power Supply to the cable junction (using ColorGlo CL-JUNCTION for one power-in and 9 power-out capability). Connect (snap in) cable into junction. Drill an entrance opening in channel letter, run cable through and plug it into the primary module. The primary module serves as the central connection point for each row/column of modules within the letter.
- 2 Clean channel letter surfaces to remove any dirt and oil. Peel the adhesive backing off the properly spaced modules and apply them to the inside of your channel letter. If the area is too dirty or bumpy for tape adhesion, use VHB tape to attach modules to the base of the channel letter.
- 3 Once all the modules have been applied, interconnect modules with the module-to-module cables by simply plugging in each cable connector to the appropriate module port.
- 4 The CL-JUNCTION enables direct letter to power connection and eliminates drilling an extra opening (for exit cable). Though not recommended, installation can be accomplished without the CL-JUNCTION, by running cable through an exit opening and daisy chain connecting to subsequent letters; then, when all modules are connected, connect power to each letter using the letter-to-letter cables.
- 5 Repeat Steps 2-4 for all channel letters.
- 6 Plug your transformer into electrical service.

Instructions and templates with recommendations for module placement are available. Consult your ColorGlo sales representative or Authorized Dealer, or contact J&J Electronics.



ColorGlo™

Manufactured by:  J&J Electronics • 35 Hammond, Irvine, CA 92618 USA • 800.735.4553 • 949.455.4460 • www.colorgloledlighting.com

Rev. 011607